




L400-25

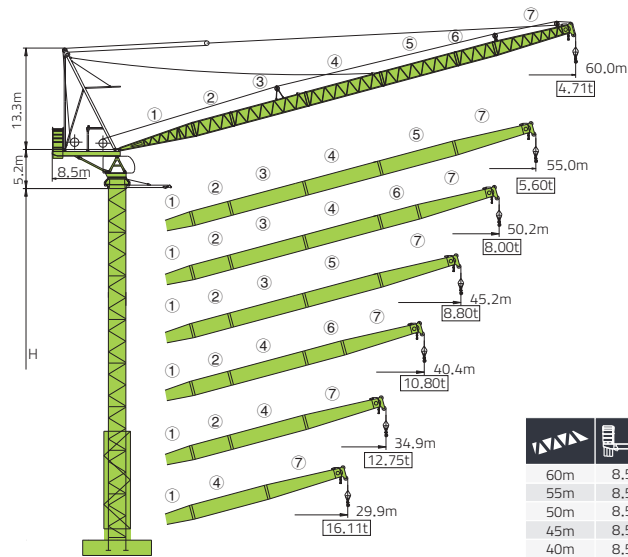

| | | H | | PHZ 10000A | PHZ 10000 | PHZ 6000 | PHZ 3000 | PHZ 2000 |
|-----|------|----|-------|------------|-----------|----------|----------|----------|
| 60m | 8.5m | H1 | 37000 | 1 | 1 | 2 | 1 | 1 |
| 55m | 8.5m | H2 | 37000 | 1 | 1 | 2 | 1 | 1 |
| 50m | 8.5m | H3 | 37000 | 1 | 1 | 2 | 1 | 1 |
| 45m | 8.5m | H4 | 31000 | 1 | 1 | 1 | 1 | 1 |
| 40m | 8.5m | H5 | 29000 | 1 | 1 | 1 | 1 | 0 |
| 35m | 8.5m | H6 | 26000 | 1 | 1 | 1 | 0 | 0 |
| 30m | 8.5m | H7 | 26000 | 1 | 1 | 1 | 0 | 0 |


Final product specification shall be in accordance with purchase order or sales contract only

塔身 Masts / 反力 Reactions

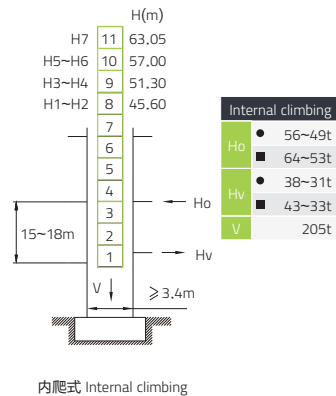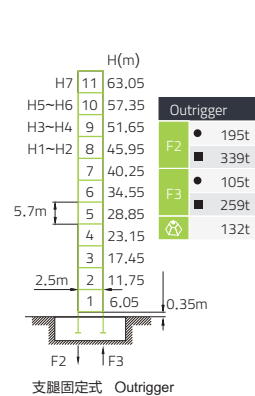


- 工作状态反力
Reactions in service
- 非工作状态反力
Reactions out of service
- ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing height, max jib
(without counter-weight and load)

附着 Anchorages

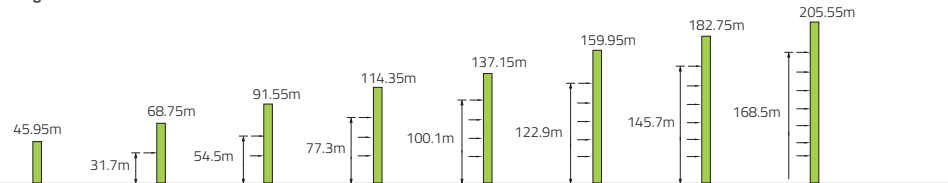


L400-25

起重臂 Luffing Jib

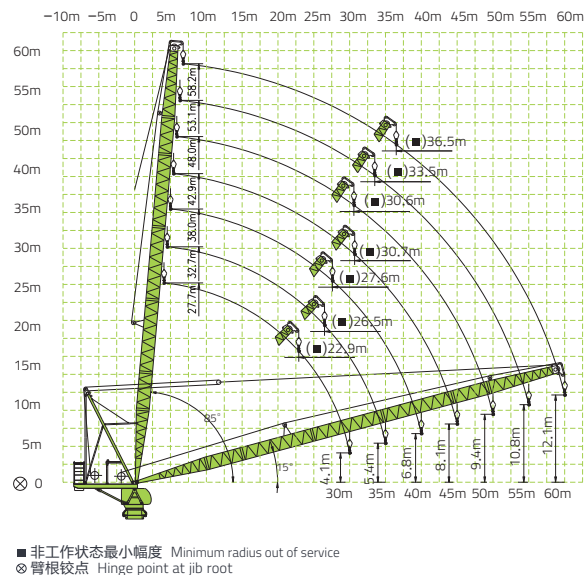






起重特性 Load Diagram

|  | | Max Capacity m/t | 20.0 | 25.0 | 30.0 | 35.0 | 40.0 | 45.0 | 50.0 | 55.0 | 60.0 |
|---|---|------------------|-------|---------------|---------------|---------------|-------|--------------|--------------|--------------|--------------|
| 60 | ⊙ | 6.8~24.3/12.50 | 12.50 | 12.41 | 10.45 | 8.87 | 7.62 | 6.59 | 5.87 | 5.30 | 4.71 |
| | ⊕ | 6.5~21.0/14.00 | 14.00 | 12.30 | 10.23 | 8.65 | 7.40 | 6.38 | 5.68 | 5.14 | 4.60 (59.6m) |
| 55 | ⊙ | 6.3~27.7/12.50 | 12.50 | | 11.48 | 9.48 | 8.10 | 7.03 | 6.21 | 5.60 | |
| | ⊕ | 6.1~21.2/16.00 | 16.00 | 13.81 | 11.24 | 9.26 | 7.84 | 6.85 | 6.05 | 5.51 (54.5m) | |
| 50 | ⊙ | 5.9~31.4/12.50 | 12.50 | | | 11.10 | 9.61 | 8.50 | 8.00 (50.2m) | | |
| | ⊕ | 5.6~14.3/25.00 | 19.22 | 15.48 | 12.88 | 10.89 | 9.44 | 8.35 | 7.94 (49.7m) | | |
| 45 | ⊙ | 5.4~32.6/12.50 | 12.50 | | | 11.67 | 10.00 | 8.80 (45.2m) | | | |
| | ⊕ | 5.2~16.1/25.00 | 20.74 | 16.70 | 13.67 | 11.48 | 9.84 | 8.76 (44.7m) | | | |
| 40 | ⊙ | 5.0~35.1/12.50 | 12.50 | | | 12.50 (40.4m) | | | | | |
| | ⊕ | 4.7~20.2/25.00 | 25.00 | 19.41 | 15.31 | 12.42 (39.9m) | | | | | |
| 35 | ⊙ | 4.5~35.4/12.50 | 12.50 | | | 12.50 (35.4m) | | | | | |
| | ⊕ | 4.3~20.4/25.00 | 25.00 | 19.48 | 15.47 (34.9m) | | | | | | |
| 30 | ⊙ | 4.1~30.4/12.50 | 12.50 | | 12.50 (30.4m) | | | | | | |
| | ⊕ | 3.8~20.5/25.00 | 25.00 | 19.76 (29.9m) | | | | | | | |

L400-25

■ 传动机构 Mechanisms

| 配置 configuration | | ♁ | | | ♂ | | | kW |  | |
|---|------------------------------|-----------------|------------------|-------|-------|--------|--------|--------------|---|----------------------|
| | | Ⅲ | Ⅳ | Ⅴ | Ⅲ | Ⅳ | Ⅴ | | | |
|  起升 Hoisting | QPL2590 | m/min | 0~37.5 | 0~75 | 0~94 | 0~18.8 | 0~37.7 | 0~47 | 90 | 900m ⌀ (6 layers) |
| | | t | 12.5 | 6.25 | 3 | 25 | 12.5 | 6 | | |
| | H132FL125-910D (option) | m/min | 0~53 | 0~106 | 0~132 | 0~26.5 | 0~53 | 0~66 | 132 | |
| | | t | 12.5 | 6.25 | 3 | 25 | 12.5 | 6 | | |
|  回转 Slewing | HPW75F1.130A HPW75F2.130A | r/min | 0~0.72 | | | | | 3x145 N.m | ①超出咨 询我们 Consult us if overtop | |
|  变幅 Luffing | BPL600 | min | 3(15 °~ 85 °) | | | | | 60 | | |
| | BPL750B (option) | min | 2.65(15 °~ 85 °) | | | | | 75 | | |
|  | 380V(±10%)50Hz | 172.5 /229.5 kW | | | | | | | | |